

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**


[ABOUT DELPHION](#)
[PRODUCTS](#)
[NEWS & EVENTS](#)
[MY ACCOUNT](#)
[IP SEARCH](#)
[1139](#)
[Log Out](#)
[Order Form](#)
[Work Files](#)
[View Cart](#)
[Browse Codes](#)
[IP Listings](#)
[Prior Art](#)
[Derwent](#)
[Advanced](#)
[Boolean](#)
[Quick/Number](#)

The Delphion  
Integrated  
View

Other Views:  
[INPADOC](#)

Title: **JP11204151A2: BATTERY COOLING DEVICE OF ELECTRIC VEHICLE**  
 ► [Want to see a more descriptive title highlighting what's new about this invention?](#)

Country: **JP Japan**  
 Kind: **A**

Inventor(s): **SHIMONOSONO HITOSHI**



Applicant/Assignee: **NISSAN MOTOR CO LTD**

[News, Profiles, Stocks and More about this company](#)

Issued/Filed Dates: **July 30, 1999 / Jan. 8, 1998**

Application Number: **JP1998000002045**

IPC Class: **H01M 10/50; B60L 11/18; F01P 3/12; B60K 1/04; B60K 11/04;**

► [Interested in classification by use rather than just by description?](#)

Priority Number(s): **July 21, 1998 JP1998000002045**

Abstract:



**Problem to be solved:** To provide a battery cooling device for an electric vehicle capable of efficiently controlling the battery temperature.

**Solution:** A heat pipe 3 is brought into contact with a battery module 1, the other end of the heat pipe 3 is connected to a heat sink 5, and the heat generated in the battery is transferred to the heat sink 5, a heat accumulating material 6 such as paraffin is contained in the heat sink 5, and a cooling water passage 7 passing through the heat reserving material 6, a cooling water piping 8 connected to the cooling water passage 7, an electric pump 9, and a radiator 10 are arranged.


COPYRIGHT: (C)1999,JPO

► [See a clear and precise summary of the whole patent, in understandable terms.](#)

Family: [Show known family members](#)

Other Abstract Info: **DERABS G1999-484467 DERABS G1999-484467**

Foreign References: **No patents reference this one**

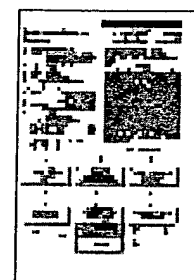

[View Image](#)

**1 page**



Nominate this  
for the Gallery...

---

[Subscribe](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [FAQ](#) | [Site Map](#) | [Help](#) | [Contact Us](#)

© 1997 - 2002 Delphion Inc.



(19)

(11) Publication number: **11204151 A**

Generated Document.

**PATENT ABSTRACTS OF JAPAN**(21) Application number: **10002045**(51) Intl. Cl.: **H01M 10/50 B60L 11/18 F01P 3/12**(22) Application date: **08.01.98**

(30) Priority:

(43) Date of application  
publication: **30.07.99**(84) Designated contracting  
states:(71) Applicant: **NISSAN MOTOR CO LTD**(72) Inventor: **SHIMONOSONO HITOSHI**

(74) Representative:


**(54) BATTERY COOLING  
DEVICE OF ELECTRIC  
VEHICLE**


(57) Abstract:

**PROBLEM TO BE SOLVED:** To provide a battery cooling device for an electric vehicle capable of efficiently controlling the battery temperature.

**SOLUTION:** A heat pipe 3 is brought into contact with a battery module 1, the other end of the heat pipe 3 is connected to a heat sink 5, and the heat generated in the battery is transferred to the heat sink 5, a heat accumulating material 6 such as paraffin is contained in the heat sink 5, and a cooling water passage 7 passing through the heat reserving material 6, a cooling water piping 8 connected to the cooling water passage 7, an electric pump 9, and a radiator 10 are arranged.

COPYRIGHT: (C)1999,JPO

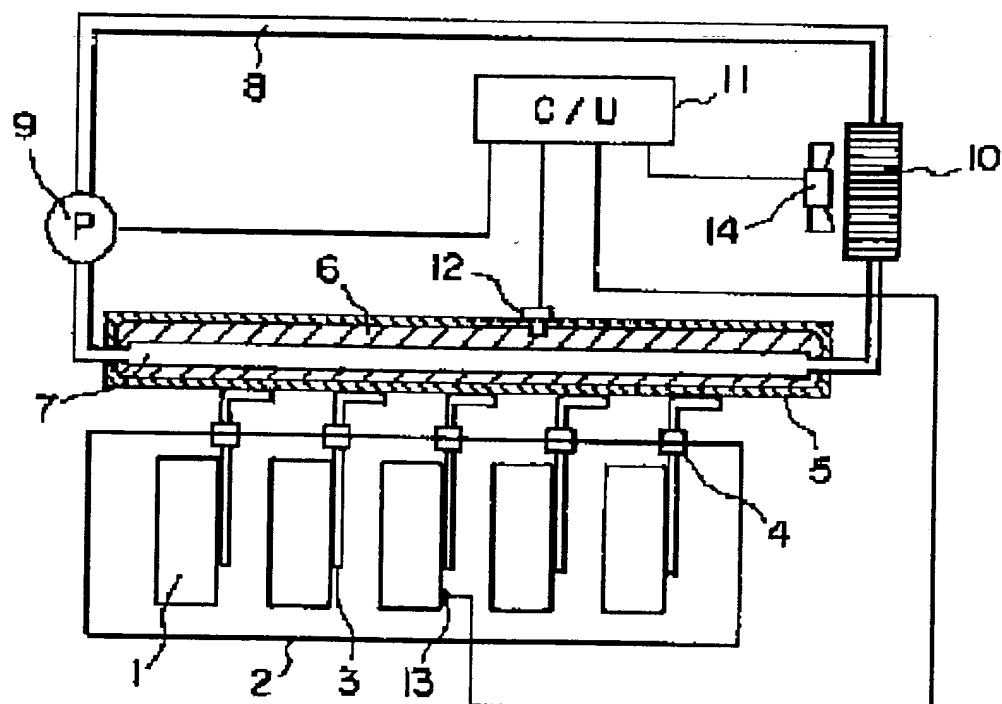



[Log Out](#)
[Order Form](#)
[Work Files](#)
[View Cart](#)

[ABOUT DELPHION](#)
[PRODUCTS](#)
[NEWS & EVENTS](#)
[MY ACCOUNT](#)
[IP SEARCH](#)

[Browse Codes](#)
[IP Listings](#)
[Prior Art](#)
[Derwent](#)
[Advanced](#)
[Boolean](#)
[Quick/Number](#)

Derwent Information adds clarity and brings out the real meaning of each patent or application – letting you complete your research more quickly with better results.

Derwent Records like this one are available FREE for a limited time.

[More Information ►](#)

## Battery cooling system for electric vehicle - has heat exchange pipe to contact battery module and heat sink for transferring heat generated in battery module to heat sink


Assignee: **NISSAN MOTOR CO LTD** Standard company (NSMO...)  
 Inventor(s): **none**

Accession / Update: **1999-484467 / 199945**

IPC Class: **B60K 1/04 ; B60K 11/04 ; H01M 10/50 ; B60L 11/18 ; F01P 3/12 ;**

Derwent Classes: **X16; X21; Q13; Q14; Q51;**

Manual Codes: **X16-K(Battery cooling and heating) , X21-A01F(Electric vehicle) , X21-B01A(Traction battery)**

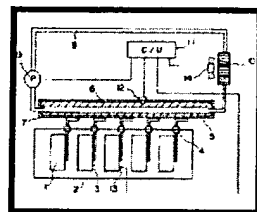

### Derwent Abstract

#### DERWENT RECORD

► Set Up Derwent Access Now

( JP11204151A ) **Novelty** - Heat exchange pipe (3) contacts a battery module (1) and a heat sink (5) so that heat generated in battery module is transferred to the heat sink through the heat exchange pipe. Cooling water path (7) penetrates thermal storage materials (6) such as paraffin inside the heat sink. Electrically driven pump (9) and radiator (10) are connected to cooling water path via a cooling water pipe (8). **Detailed Description** - Thermal storage material absorbs the heat transferred to the heat sink. Cooling water is passed through the cooling water path for absorbing the latent heat of the thermal storage material. Radiator releases the heat transferred to the cooling water to the outer air. An INDEPENDENT CLAIM is also included for the battery temperature controlling method.


**Use** - For electric vehicle.

**Advantage** - Enables to control battery temperature efficiently. Achieves equalisation of skin temperature of battery module by increasing contact area of battery module and heat exchange pipe.

**Description of Drawing(s)** - The figure shows composition of battery cooling system. (1) Battery module; (3) Heat exchange pipe; (5) Heat sink; (6) Thermal storage materials; (7) Cooling water path; (8) Cooling water pipe; (9) Pump; (10) Radiator.

Abstract info: **JP11204151A: Dwg.1/7**

Images:

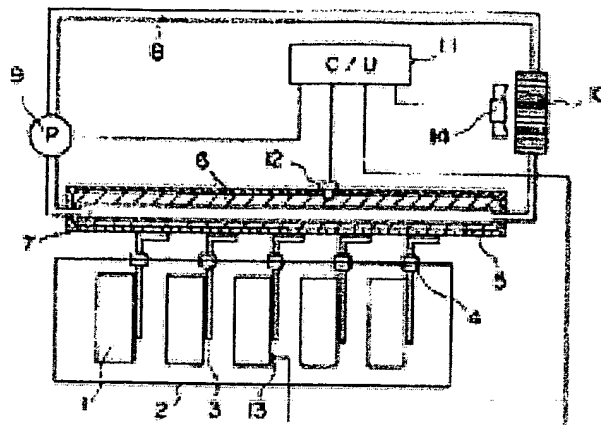

Family:

**Patent**      **Issued**      **DW Update**   **Pages**   **Language**   **IPC Class**  
**JP11204151A** \*   July 30, 1999   199941   6   English   H01M 10/50  
 Local apps.: JP1998000002045 ApplDate:1998-01-08 (98JP-0002045)

Priority Number(s):

Application Number	Application Date	Original Title
JP1998000002045	Jan. 08, 1998	BATTERY COOLING DEVICE OF ELECTRIC VEHICLE

Title Terms:

BATTERY COOLING SYSTEM ELECTRIC VEHICLE HEAT EXCHANGE PIPE CONTACT BATTERY MODULE HEAT SINK TRANSFER HEAT GENERATE BATTERY MODULE HEAT SINK

[Pricing](#)   [Current charges](#)

Data copyright Derwent 2002

**Derwent  
Searches**

[Patent /  
Numbers](#)

[Boolean Text](#)

[Advanced Text](#)

[Demo](#)

[Subscribe](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [FAQ](#) | [Site Map](#) | [Help](#) | [Contact Us](#)

© 1997 - 2002 Delphion Inc.